


SHENZHEN LIAN XUN INDUSTRIES CO.,LTD.

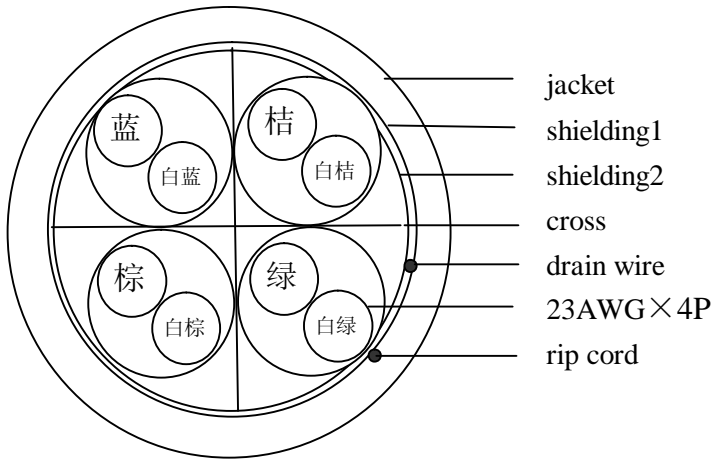

Color code

1. Blue-White/Blue
2. Green-White/Green
3. Orange-White/Orange
4. Brown-White/Brown

ITEM		
No.of Cond.(芯線數)		4 Pair 對
Conductor 導體	Material (材質)	bare copper Solid (裸銅線)
	Construction (結構)	23AWG; 1 / 0.58 ± 0.008 mm
Insulation 絕緣	Material (材質)	Polyethylene
	Thickness (厚度)	0.26 mm
	Diameter (外徑)	1.1 ± 0.05 mm
Shielding1 隔離1	Material (材質)	Aluminum Mylar Spirally Wrapped
	Coverage(遮蔽率)	100% coverage with 25% overlapping
Shielding2 隔離2	Material (材質)	Mylar Spirally Wrapped
	Coverage(遮蔽率)	100% coverage with 25% overlapping
Drain Wire 地線	Material (材質)	Aluminum Magnesium alloy Solid (铝镁丝)
	Construction (結構)	26AWG; 1 / 0.40 ± 0.008 mm
Cross 十字骨架	Material (材質)	Polyethylene
	Diameter (外徑)	4.0 × 4.0 ± 0.1 mm
Rip cord 撕裂线	Material (材質)	Nylon
Jacket 被覆	Material (材質)	PVC
	thickness (厚度)	0.50 mm (Min. Thickness: 0.40mm)
	Diameter (外徑)	7.0 ± 0.20 mm
	Color (顏色)	Gray
Marking 噴碼	COMMUNICATIONS CABLE CM 75°C 4/23 CAT 6 FTP VERIFIED TO TIA/EIA 568B.2 UL LIST 米标 年.月.日	

ELECTRICAL PROPERTIES(電氣特性)

ITEM		
Insulation Resistance (絕緣電阻)		Min. 5000 mega ohms-km at 20°C
Dielectric Test (耐電壓)		1000V DC /1 min ; No Breakdown
Temperature Rating (額定溫度)		75°C
Voltage Rating (額定電壓)		30V

DRWN.	Zhangbiao	SPEC NO:	Construction: 23AWG × 4P
CHKD.	Cheng	LC64P058BC105	Customer: 联網 Customer NO.: 06G-R4P-S23-SH-XX
APPD.	Cheng		